

Series 420

SPECIFICATIONS

技術資料

D-Subminiature Connector

Solder Type (Type 30)

(Male & Female)

高密度串口連接器

ELECTRICAL

- Contact Resistance: 30mΩ max. At DC 100mA
- Insulator Resistance: 1000mΩ min. At DC 250V
- Current Rating: 5AMP
- Dielectric Withstanding Voltage: AC 1000V for 1 minute
- Operating Temperature: -55°C to +105°C
- Contact:
 - Male: Brass
 - Female Phosphor Bronze
- Insulator: PBT & 30% Glass Fiber (UL 94-0)



420-251-30



420-252-30



Position	Dimension				
	A	B	C	D	E
9	16.92	42.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84
50	52.86	61.11	67.90	55.30	52.34

Unit = mm



SERIES 420 (TYPE 30) (MALE)

SERIES 420 (TYPE 30) (FEMALE)

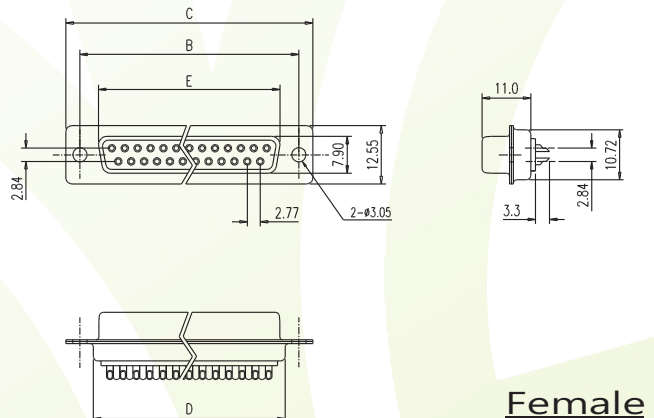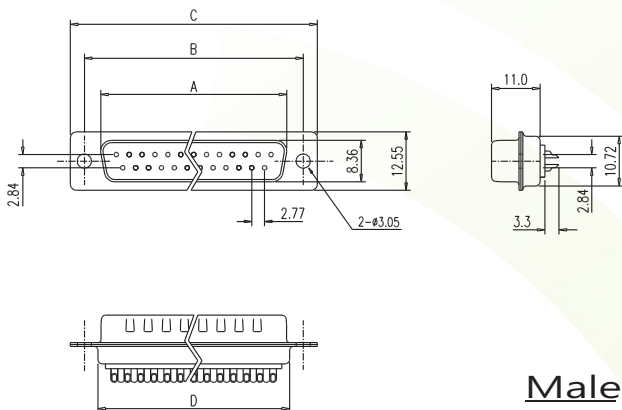

HOW TO ORDER 排序整理

4 2 0 - X X X - 3 0

Series No.
系列編號

No. of Pin
針腳數目

1	Male
2	Female